

Datacomms Single Section Wall Mounted Cabinets



Standard

Comply with ANSI/EIA RS-310-D, DIN41497 part 1, IEC297-2, DIN41494 part 7, GBIT3047.2-92 standard.

Feature

- 19 inch standard;
- Removable Side Panels, side locks optional;
- Knock off hole for entering cable on both top cover, bottom panel, rear panel
- Turning angle of front door is over 180 degrees
- Easy mounting installation
- Unassembled package saving shipping space
- Fans, shelf, PDU are optional

Loading Capacity

25KGS

Degree of Protection

IP20


Material

SPCC Cold Rolled Steel
Thickness:1.0mm-0.6mm

Surface Finish:

Powder coating

Cabinet details

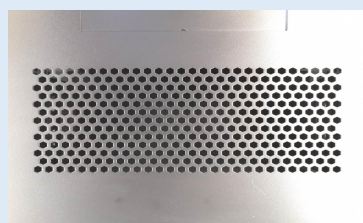

Fan exhaust hole




Bottom



Removable side panels
(Side lock optional)



Cable entrance on rear panel

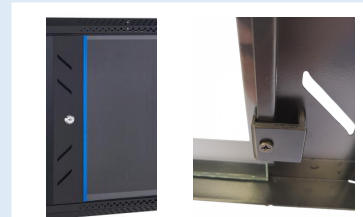

Front tempered glass door
with metal perforated
border



Zinc plated mounting profile
with U mark
(Ground wire optional)

Simple Code	Description
DCN-WM-6406	DATACOMM Single Section 6U 600 X 450 WM cabinet
DCN-WM-6409	DATACOMM Single Section 9U 600 X 450 WM cabinet
DCN-WM-6412	DATACOMM Single Section 12U 600 X 450 WM cabinet
DCN-WM-6415	DATACOMM Single Section 15U 600 X 450 WM cabinet
DCN-WM-6606	DATACOMM Single Section 6U 600 X 600 WM cabinet
DCN-WM-6609	DATACOMM Single Section 9U 600 X 600 WM cabinet
DCN-WM-6612	DATACOMM Single Section 12U 600 X 600 WM cabinet
DCN-WM-6615	DATACOMM Single Section 15U 600 X 600 WM cabinet

The information provided in this document is subject to change without any prior notice.